

ECO-FRIENDLY
HEAT EXCHANGERS
HWT-H

SUITABLE FOR UP TO 30% H₂ FEED INTO THE GAS NETWORK

Heat exchangers, horizontal version

- Heat exchanger in welded steel construction combined into one pressure device
- For the preheating of gases in various systems
- Standard device in reducer stations upstream of gas pressure regulators
- Suitable for natural gas, related combustible gases, hydrogen and non-aggressive gases
- Pipe bundle tubes made of seamless carbon steel tubes
- Also available as a cooler according to the intended use

Benefits

- Suitable for up to 30% H₂ feed into the gas network
- The horizontal welded design allows for cost-efficient tube and shell heat exchangers
- Easy siting without overall height problems
- Welded or flanged tube bundles available
- Customised design with free nozzle position, selectable gas rail axis, etc.
- Optional pre-pressure-resistant water chamber design – also with hot water SSV
- Tube bundle complete or heat exchanger tubes only optionally available in stainless steel
- Standard bundle sealing on the tube plate with O-ring, optionally available with flat seal
- Version also for hot water, steam and high gas temperatures

Functional description


- Compensation for the Joule/Thompson effect by the heat exchanger – upstream of the gas pressure regulator
- Optimised heat transfer with adapted baffles
- Automated welding in of the bundle tubes

Design and calculation

- Design in accordance with PED2014/68/EU, EN13445, AD2000; with CE marking
- Optional design in accordance with ASME Section VIII, with/without U-stamp, further specific country codes
- Continuous application of ISO9001 with regularly audited quality system
- TEMA design applicable as standard
- NACE design possible as an option
- Process-engineering design in accordance with own adapted calculation programmes
- Optimised design of the diameters of the pipe bundle tubes according to the intended use
- Low temperature and maximum pressure design available according to customer requirements
- Preliminary examination/construction testing, material testing, non-destructive material testing in accordance with the standard
- Customer-specific acceptance requirements optionally selectable, e.g. helium leak test
- Acceptance by experts such as TÜV, Lloyd, etc., also by a customer expert

Optional accessories

- Hot water SSV SV422 in conjunction with the pre-pressure-resistant water jacket
- Pressure safety valves for gas and water, pressure gauges, thermometers
- Drain and vent cocks G1/2" for gas and water
- Temperature control of the natural gas outlet temperature, also with control cabinet
- Bypass damper control with EEx actuator for lowest possible differential pressures
- Blanking discs, insulation
- Special coating for corrosive atmosphere possible as an option

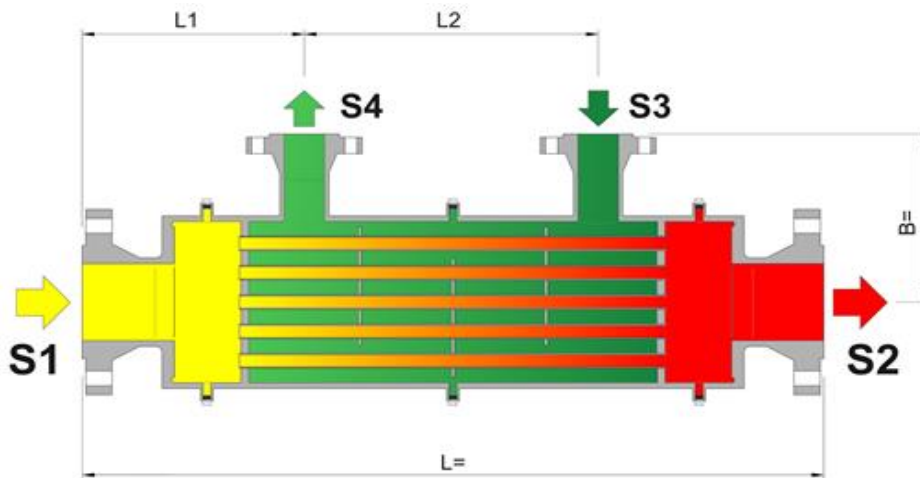

DN 1, 2 DN gas flanges may also differ; DN 3, 4 WW flange lengths variable
 Connections 5, 6, 7, 8, 9, 10 optional G 1/2" internal Connections 11, 12, PSV>as required

Standard sizes Customised solutions available – detailed design always in accordance with quote

HWT-H Type	heating area m ²	øD _A	DN 1,2	DN 3,4	L	B	L1	L2
100	H500	0,41	114,3	25	850	180	220	410
	H750	0,62		50	1100		640	
	H1000	0,83		50	1350		870	
125	H500	0,64	139,7	80	850	210	240	370
	H750	0,97		25	1100		620	
	H1000	1,30		25	1350		870	
150	H500	1,00	168,3	80	900	230	250	400
	H750	1,52		25	1150		650	
	H1000	2,04		25	1400		900	
200	H500	1,75	219,1	100	950	250	290	370
	H750	2,66		50	1200		620	
	H1000	3,56		50	1450		870	
250	H500	2,97	273,0	150	950	300	310	330
	H750	4,51		50	1200		580	
	H1000	6,05		80	1450		810	
300	H500	4,62	323,9	200	1000	350	330	340
	H750	7,00		50	1250		590	
	H1000	9,39		50	1500		820	
	H1250	11,77		80	1750		1070	
	H1500	14,15		80	2000		1320	
350	H500	4,80	355,6	200	1250	380	420	410
	H750	7,30		50	1500		600	
	H1000	9,80		80	1750		850	
	H1250	12,30		80	2000		1100	
	H1500	14,80		80	2500		1350	
400	H500	6,50	406,4	250	1350	400	480	390
	H750	9,90		50	1600		600	
	H1000	13,20		80	1850		850	
	H1250	16,60		100	2100		1060	
	H1500	20,00		100	2350		1310	
500	H500	10,20	508,0	300	1400	450	520	360
	H750	15,50		80	1650		610	
	H1000	20,80		100	1900		820	
	H1250	26,10		100	2150		1030	
	H1500	31,40		150	2400		1280	
600	H500	15,80	610,0	400	1550	500	600	360
	H750	23,90		100	1800		610	
	H1000	32,10		150	2050		810	
	H1250	40,20		150	2300		1000	
	H1500	48,40		200	2550		1250	
700	H500	21,60	711,0	400	1650	550	650	350
	H750	32,20		150	1900		540	
	H1000	43,20		200	2150		710	
	H1250	54,20		200	2400		960	
	H1500	65,20		200	2650		1210	

HEAT

GAS AND OIL EQUIPMENT

HEAT energy GmbH

A-2362 Biedermannsdorf, Rheinboldtstraße 16
Tel.: +43(0) 6648241616
heat-energy@heatgroup.at
www.heatgroup.at

HEAT gaswärmetechnische Anlagen GmbH

D-34119 Kassel, Querallee 41
Tel.: +49(0) 561288560
Fax: +49(0) 5612885620
office@heatgroup.de
www.heatgroup.de

HEAT Romania S.R.L.

RO-547 185 Cristesti (Targu Mures)
Strada Principală nr. 801
Tel.: +40(0) 365430057
Fax: +40(0) 365430057
office@heatgroup.ro
www.heatgroup.ro

HEAT Poland Sp. z o.o.

PL-40 761 Katowice, ul. Twarda 21
Tel.: +48 32 252 17 82
Fax: +48 32 252 17 82
info@heatgroup.pl
www.heatgroup.pl

QR code

Brochure

HEAT energy Kft.

H-8800 Nagykanizsa, Erdész u. 28.
Tel.: +36(0) 93537140
Fax: +36 93 537 142
heat-energy@heatgroup.hu
www.heatgroup.hu

LOG Oiltools Kft.

H-8800 Nagykanizsa, Erdész u. 28.
Tel.: +36(0) 93537140
Fax: +36 93 537 142
info@logoiltools.hu
www.logoiltools.hu

HEAT Hungary Kft.

H-1047 Budapest, Attila u. 63.
Tel.: +36(0) 13691532
Fax: +36(0) 13697216
heatgroup@heathungary.hu
www.heathungary.hu

HEAT Bulgas OOD

BG-1113 Sofia, Fr. Joliot Curie Str. 20, Office 803
Tel.: +359 88 945 2607
office@heatgroup.bg
www.heatgroup.at

QR code

Enquiry sheet

HEAT Holding International GmbH

A-2362 Biedermannsdorf, Siegfried Marcus-Straße 9
Tel.: +359 88 945 2607
Fax: +43 2236 73 130 - 300
ghi@heatgroup.at
www.heatgroup.at